

TOTAL HEAD

REPRIMING LIFTS

RPM	650	750	850	950	1050	1150	1250	- 1950
FEET	5	8	16	19	22	24		25
METERS	1,5	2,4	4,9	5,8	6,7	7,3		7,6

Figure NPSH required prior to using above table. DO NOT use as available Suction Lifts.

3.00"/[76,2 MM] DIA. MAX. SPHERICAL SOLIDS

PERFORMANCE CURVE


VOLUTE 10525D / 10525B CURVE T4A-B-4

IMPELLER 10528 MODEL T4A-B

SIZE 4"X4" IMP.DIA. 9.75"

SP.GR. 1.0 RPM NOTED

Select performance within operating range of curve.

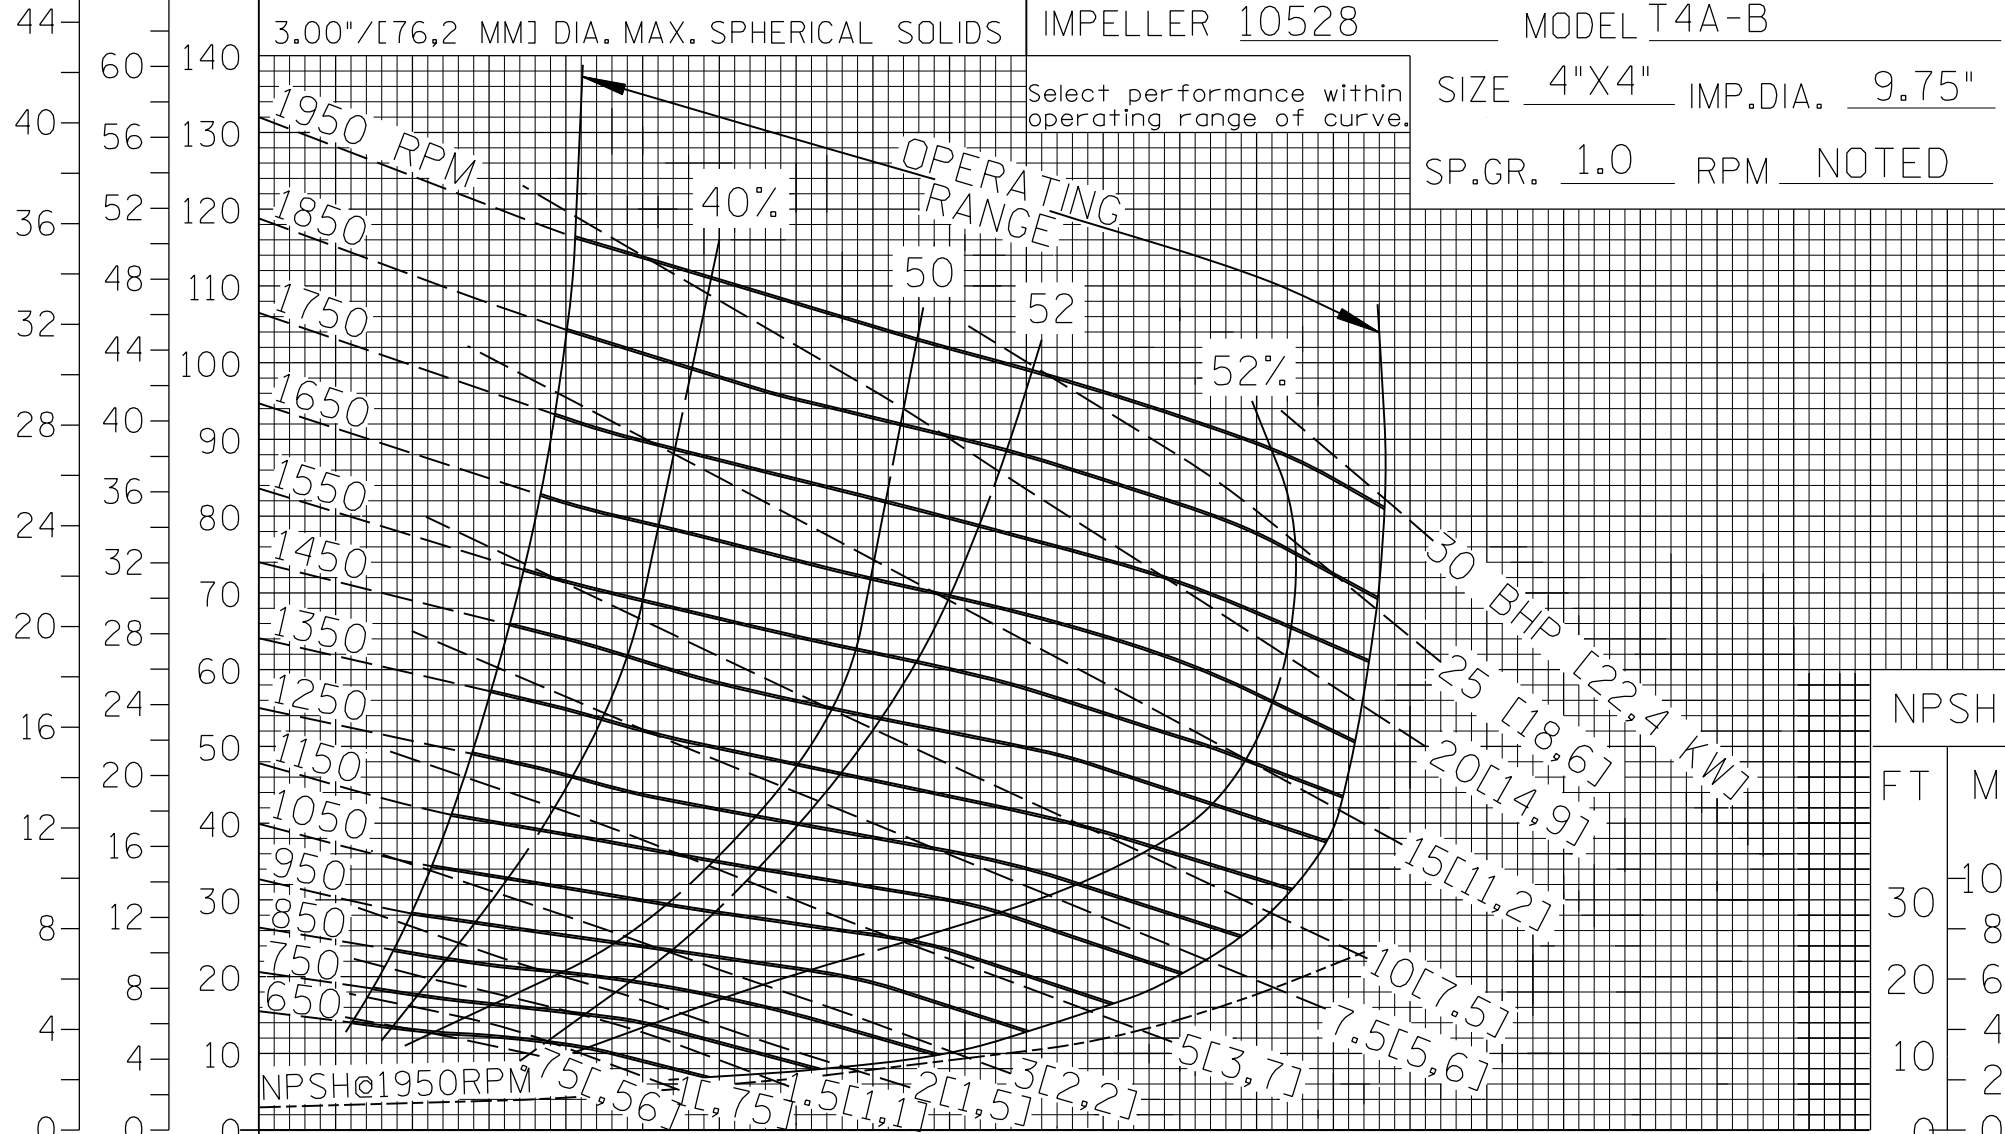

NPSH
FT M
30 10
8 8
6 6
4 4
2 2
0 0

U.S. GALLONS PER MINUTE X 10 LITRES PER SECOND CUBIC METRES PER HOUR X 10

0 5 10 15 20 25 30 35 40 45 50 55 60 65 70 75 80 85 90 95 100

0 4 8 12 16 20 24 28 32 36 40 44 48 52 56 60 64

0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23



T-4-13-R

FILE NO. t4ab.s04