


TOTAL HEAD

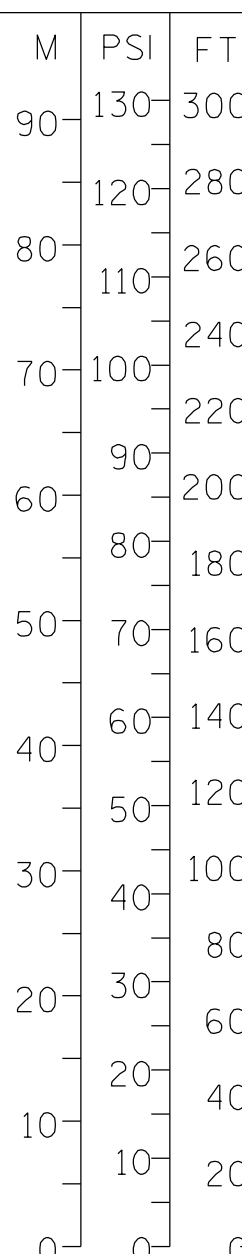

REPRIMING LIFTS

RPM	1950-1750	1450	1150	850
FEET	20	14	10	6
METERS	6,1	4,3	3,1	1,8

1.25"/[31,8mm] DIA. MAX. SPHERICAL SOLIDS

PERFORMANCE CURVE


VOLUTE 38222-703 CURVE U6B-B-1

IMPELLER 38618-016 MODEL U6B-B


Note:
Select performance within
operating range of curve.

SIZE 6"X6" IMP.DIA. 12.50"

SP.GR. 1.0 RPM NOTED

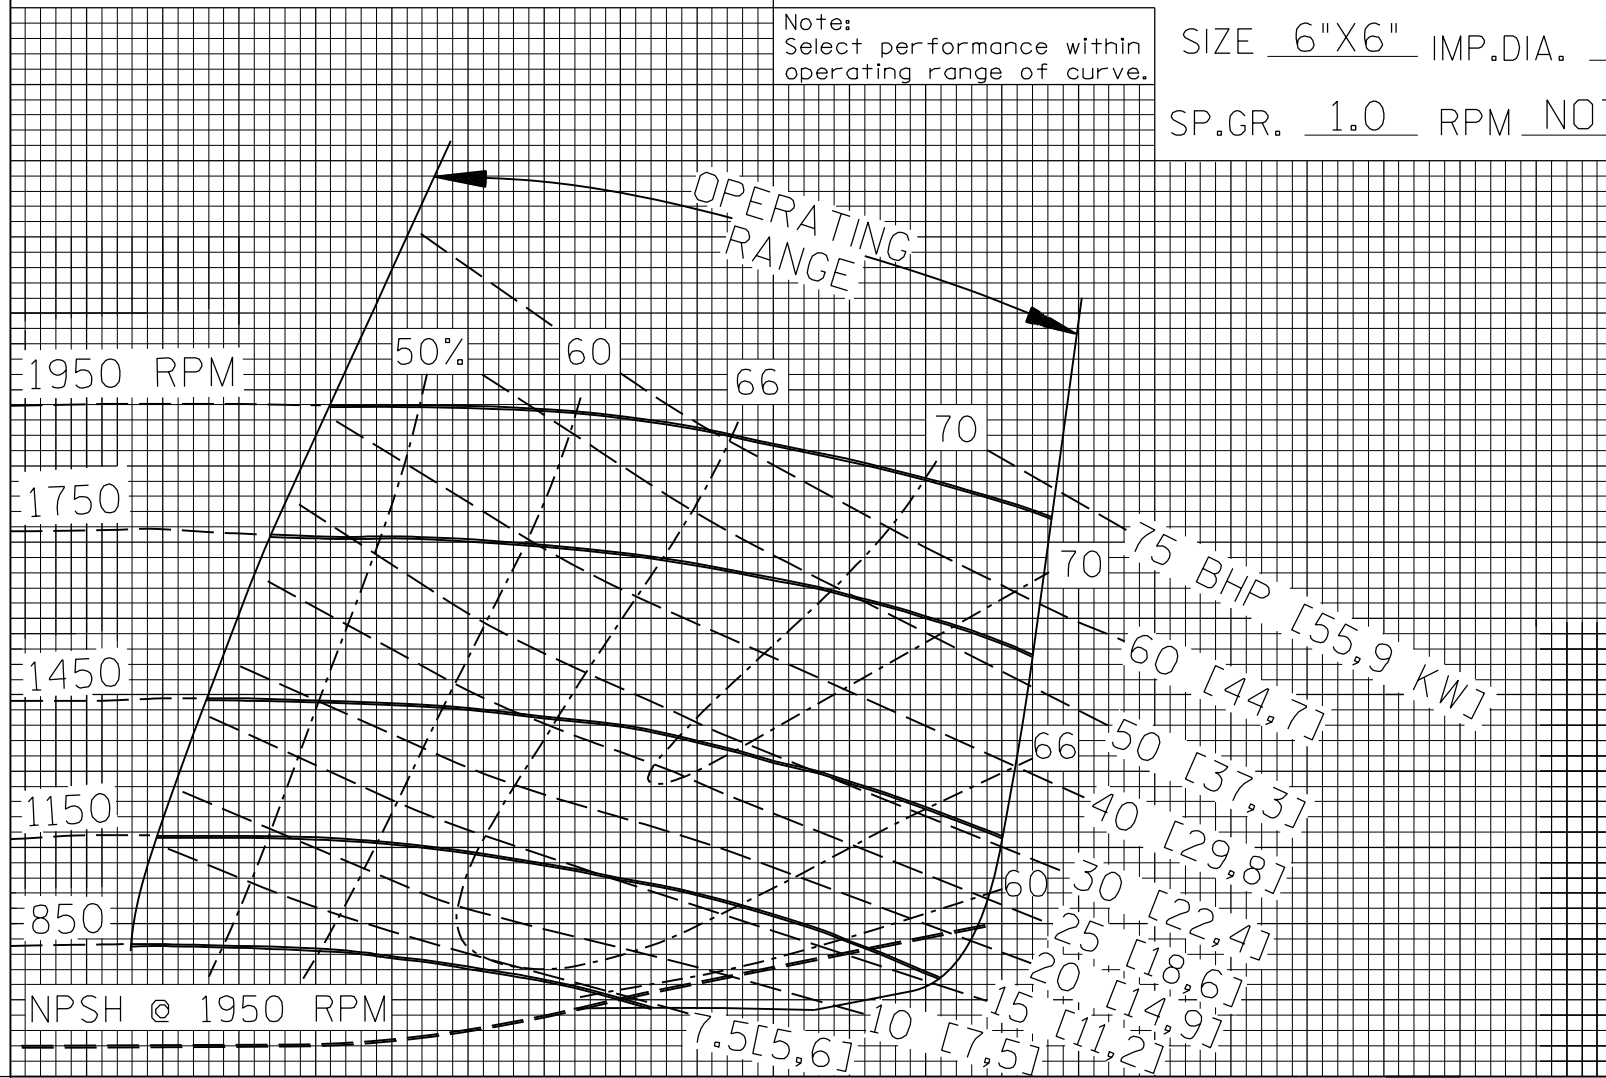


NPSH

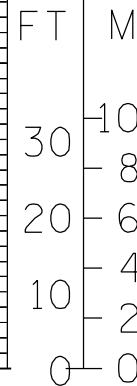

U.S.GALLONS PER MINUTE X 100

LITRES PER SECOND X 10

CUBIC METRES PER HOUR X 10

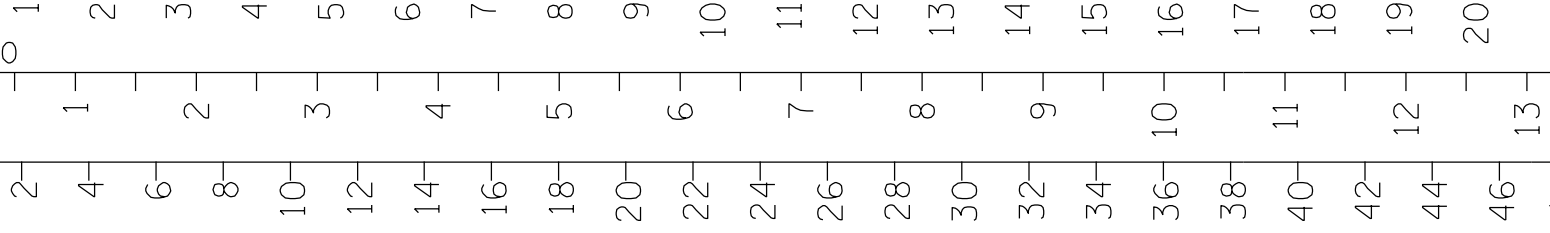

T-8-16-R

FILE NO. U6bb.S01